


VISCOMETER

B-ONE TOUCH

Viscometer and set of spindles included*

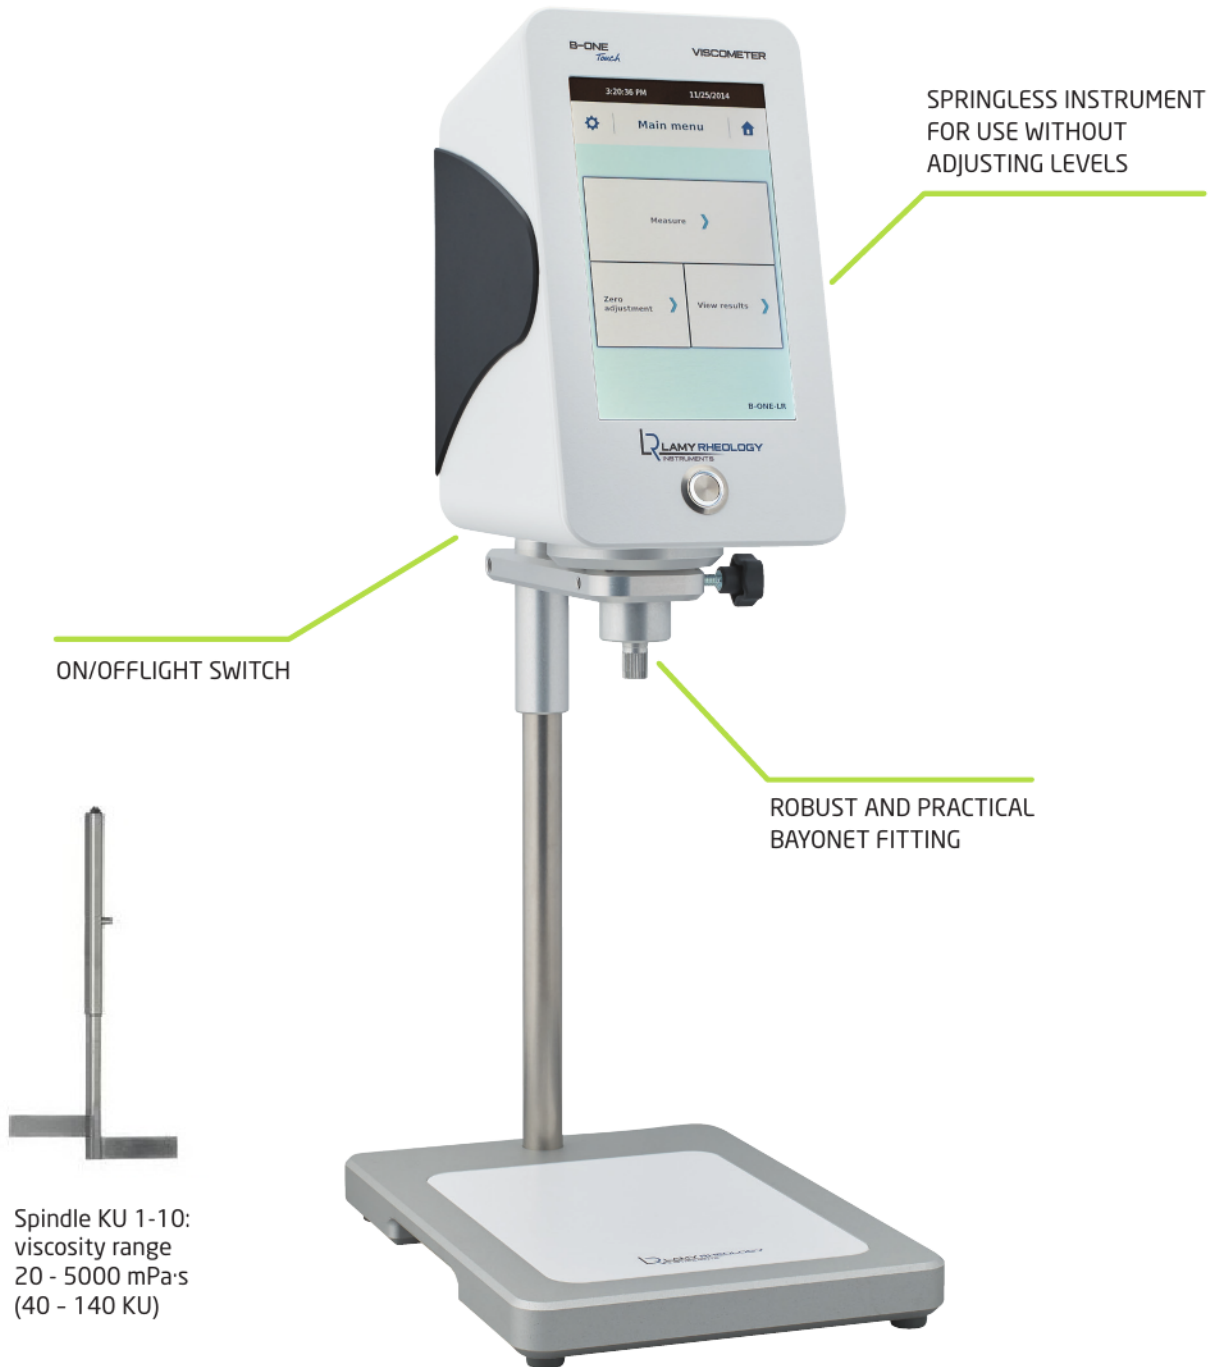

SPRINGLESS INSTRUMENT
FOR USE WITHOUT
ADJUSTING LEVELS

ON/OFFLIGHT SWITCH

ROBUST AND PRACTICAL
BAYONET FITTING

Spindle KU 1-10:
viscosity range
20 - 5000 mPa·s
(40 - 140 KU)

* Spindles L 1 to 4 or R 2 to 7.

VISCOMETER

TOUCH THE VISCOSITY OF YOUR PRODUCTS WITH YOUR FINGERS

The B-One TOUCH has a 7" touch screen and comes with a stylus. This easy-to-use screen lets you see all measurement parameters at the same time.



SPECIFICATIONS

TYPE OF INSTRUMENT	Rotating viscometer
ROTATION SPEEDS	Unlimited number of speeds between 0.3 and 250 rpm
TORQUE RANGE	From 0.05 to 13 mNm / From 0.005 to 0.8 mNm (LR VERSION)
ACCURACY	+/- 1 % of the full scale
REPEATABILITY	+/- 0.2 %
VISCOSITY RANGE	With L1 - L4 systems: 15 - 6,000,000 mPa·s With R 2 - 7 systems: 100 - 180,000,000 mPa·s
DISPLAY	7" Touch screen
DISPLAY SETTINGS	Viscosity - Speed - Torque - Time - Measuring geometry - Level of sensitivity - Date/hour - Choice of viscosity units: cP or mPa·s - Language: French/English
SECURITY AND CONFIDENTIALITY	An "operator" function allows you to enter a username for your instrument. This user must then be identified using a 4-digit code. There is also a protected mode that locks your measurement conditions.
SUPPLY VOLTAGE	90-240 VAC 50/60 Hz
WHAT BENEFITS ARE THERE FOR YOU?	The B-ONE TOUCH lets you set measuring times for thixotropic products. Kinematic viscosity when your product's density is inputted.
CARRY CASE	Optional
DIMENSIONS AND WEIGHT	Head: L180 x W135 x H250 mm / Hardened steel stand: L280 x W200 x H30 mm Stainless steel rod: Length 500 mm / Weight: 6.7 kg

ACTIVITY DOMAINS



FOOD
INDUSTRY

COSMETICS
PHARMACEUTICALS

PAINT / INK
COATINGS

CHEMICAL / PETROLEUM
PRODUCTS

CAR INDUSTRY

BUILDING
MATERIALS

TEACHING

OPTIONAL MEASURING GEOMETRIES

Spindle KU 1-10:
viscosity range
20 - 5000 mPa·s
(40 - 140 KU)

